

Technical data sheet

Suction lance model series SL 9608 and SLNS 9608


Standard suction lances for withdrawing chemical products from canisters and drums.

- Suction lance without level monitoring (model series SL 9608)
- Suction lance with level monitoring (model series SLNS 9608)



Electrical data	Switching voltage level switch:	24 V AC/DC		
	Max. switching current level switch:	300 mA		
	Level switch type:	NO contact (as supplied from factory) NC contact configurable		
Mechanical data	External diameter:	40 mm		
	Available lengths:	350 mm	425 mm	500 mm
		600 mm	1000 mm	1200 mm
	Tube connections SL and SLNS:	3 connections for tubes with \varnothing 6 mm or \varnothing 8 mm internal diameter Max. \varnothing 12 mm external diameter		
	Material:	PVC / PP		
	Compatibility:	Before use, the chemical compatibility of the product with the materials of the suction lance must be established beyond doubt.		
	Float switch cable length:	5 m (from suction lance foot)		

Dimensions

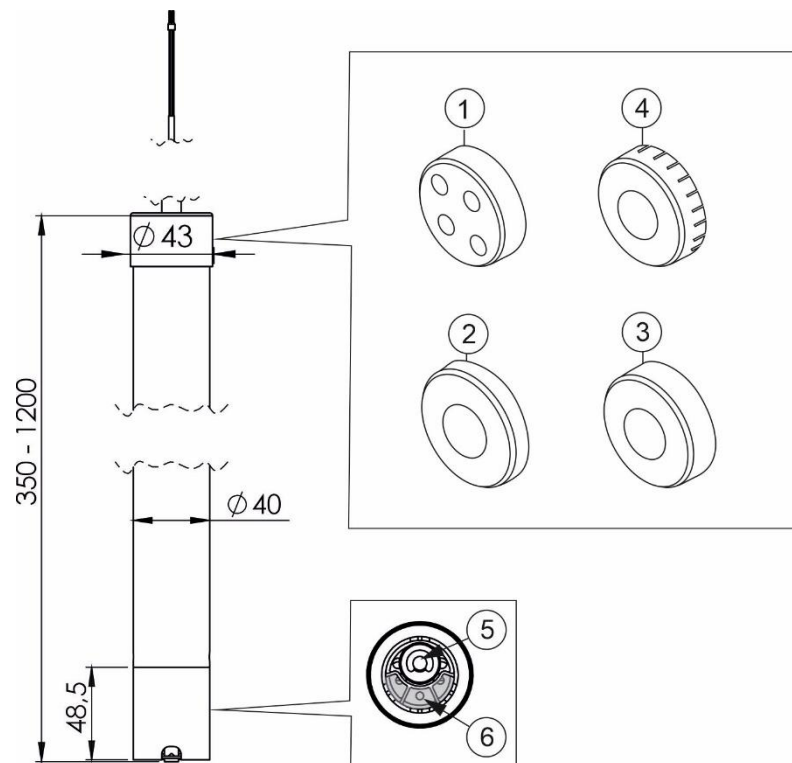

- 1) End cap (SL 9608, SLNS 9608)
- 2) Cover ring 55x13
- 3) Cover ring 60x13
- 4) Cap 90x28 (only for art. nos.: 20014, 20019, 18021, 18044)
- 5) Level switch (SLNS)
- 6) 3 suction chambers

Products	Art. no.	Designation	Length	Level switch	Tube connection
SL 9608	20012	SL 9608-350	350 mm	-	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	20013	SL 9608-500	500 mm	-	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	20015	SL 9608-600	600 mm	-	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	20014	SL 9608-1000	1000 mm	-	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	20019	SL 9608-1200	1200 mm	-	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
SLNS 9608	18046	SLNS 9608-350	350 mm	1	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	18036	SLNS 9608-500	500 mm	1	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	18045	SLNS 9608-600	600 mm	1	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	18021	SLNS 9608-1000	1000 mm	1	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)
	18044	SLNS 9608-1200	1200 mm	1	3 ($\varnothing 6$ mm / $\varnothing 8$ mm)